

# Fire Proof safe



## Passed 1hr fire rathing



Passed 1Hrs UL Fire rating / Certi No. R18040



Passed NT Fire 017-120, SP Fire rating / Certi No. 106601



Passed 1Hrs JIS Fire rating / Certi No. 0DC213/9C7139



Passed 1Hrs KS Fire rating



### BK-L



- Outside : H307×W412×D362mm
- In-side : H230×W335×D224mm
- Outside : H12×W16 $\frac{1}{4}$ ×D13 $\frac{3}{4}$ inch
- In-side : H9×W13 $\frac{1}{4}$ ×D8 $\frac{3}{8}$ inch
- Approx. Wt : 30Kgs, 66Lbs
- Fittings : 1 Plastic Tray



### BK-LT



- Outside : H412×W307×D362mm
- In-side : H335×W230×D224mm
- Outside : H16 $\frac{1}{2}$ ×W12×D13 $\frac{3}{4}$ inch
- In-side : W13 $\frac{1}{4}$ ×W9×D8 $\frac{3}{8}$ inch
- Approx. Wt : 30Kg, 66Lbs
- Fittings : 1 Plastic Tray



### BK-SS



- Outside : H333×W433×D400mm
- In-side : H237×W337×D242mm
- Outside : H13 $\frac{1}{4}$ ×W17×D15 $\frac{3}{8}$ inch
- In-side : H9 $\frac{1}{4}$ ×W13 $\frac{1}{4}$ ×D9 $\frac{1}{2}$ inch
- Approx. Wt : 37Kgs, 82Lbs
- Fittings : 1 Plastic Tray



### BK-ST




- Outside : H433×W333×D400mm
- In-side : H337×W237×D257mm
- Outside : H17×W13 $\frac{1}{4}$ ×D15 $\frac{3}{8}$ inch
- In-side : H13 $\frac{1}{4}$ ×W9 $\frac{1}{4}$ ×D10 $\frac{1}{8}$ inch
- Approx. Wt : 37Kgs, 82Lbs
- Fittings : 1 Plastic Tray



### BK-S



- Outside : H346×W486×D420mm
- In-side : H226×W366×D260mm
- Outside : H13 $\frac{3}{4}$ ×W19 $\frac{1}{4}$ ×D16 $\frac{1}{2}$ inch
- In-side : H8 $\frac{3}{4}$ ×W14 $\frac{3}{4}$ ×D10 $\frac{1}{4}$ inch
- Approx. Wt : 51Kgs, 112Lbs
- Fittings : 1 Plastic Tray

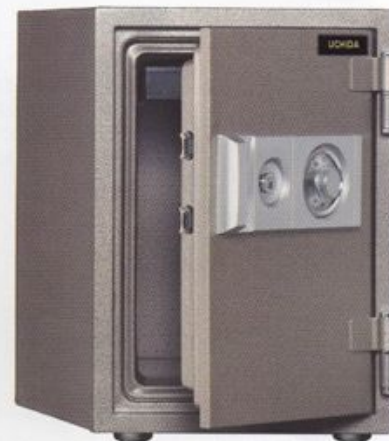

### BK-T



- Outside : H486×W346×D420mm
- In-side : H366×W226×D260mm
- Outside : H19 $\frac{1}{4}$ ×W13 $\frac{3}{4}$ ×D16 $\frac{1}{2}$ inch
- In-side : H14 $\frac{1}{4}$ ×W8 $\frac{3}{4}$ ×D10 $\frac{1}{4}$ inch
- Approx. Wt : 51Kgs, 112Lbs
- Fittings : 1 Plastic Tray

\* Hinge(W) 28mm is included, except dial height.

Lock option : EDL, Combination dial lock. Finger print lock, IC card lock



**PBK-L**



- Outside : H307×W412×D362mm
- In-side : H230×W335×D224mm
- Outside : H12×W16½×D14¼inch
- In-side : H9×W13¼×D8¾inch
- Approx. Wt : 30Kgs, 66Lbs
- Fittings : 1 Plastic Tray



**PBK-LT**



- Outside : H412×W307×D362mm
- In-side : H335×W230×D224mm
- Outside : H16½×W12×D14¼inch
- In-side : W13¼×W9×D8¾inch
- Approx. Wt : 30Kg, 66Lbs
- Fittings : 1 Plastic Tray



**PBK-SS**



- Outside : H333×W433×D400mm
- In-side : H237×W337×D242mm
- Outside : H13¼×W17×D15¼inch
- In-side : H9¼×W13¼×D9½inch
- Approx. Wt : 37Kgs, 82Lbs
- Fittings : 1 Plastic Tray



**PBK-ST**



- Outside : H433×W333×D400mm
- In-side : H337×W237×D257mm
- Outside : H17×W13¼×D15¼inch
- In-side : H13¼×W9¼×D10¼inch
- Approx. Wt : 37Kgs, 82Lbs
- Fittings : 1 Plastic Tray




**PBK-S**



- Outside : H346×W486×D420mm
- In-side : H226×W366×D260mm
- Outside : H13¼×W19¼×D16½inch
- In-side : H8 ⅞×W14¼×D10¼inch
- Approx. Wt : 51Kgs, 112Lbs
- Fittings : 1 Plastic Tray



**PBK-T**



- Outside : H486×W346×D420mm
- In-side : H366×W226×D260mm
- Outside : H19¼×W13¼×D16½inch
- In-side : H14¼×W8¼×D10¼inch
- Approx. Wt : 51Kgs, 112Lbs
- Fittings : 1 Plastic Tray



### Passed 1hr fire rathing

Passed 2Hrs SP Fire rating / Certi No, 106601/106602

Passed 1Hrs JIS Fire rating / Certi No, 9C7139/23722

Passed 1Hrs KS Fire rating



#### BK-R



- Outside : H506×W435×D502mm
- In-side : H386×W315×D325mm
- Outside : H19 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D19 $\frac{3}{4}$ inch
- In-side : H15 $\frac{1}{4}$ ×W12 $\frac{3}{8}$ ×D12 $\frac{3}{4}$ inch
- Approx. Wt : 73Kgs, 161Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf



#### PBK-R



- Outside : H506×W435×D502mm
- In-side : H386×W315×D325mm
- Outside : H19 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D19 $\frac{3}{4}$ inch
- In-side : H15 $\frac{1}{4}$ ×W12 $\frac{3}{8}$ ×D12 $\frac{3}{4}$ inch
- Approx. Wt : 73Kgs, 161Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf




#### PBK-R (H)




- Outside : H506×W435×D502mm
- In-side : H386×W315×D325mm
- Outside : H19 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D19 $\frac{3}{4}$ inch
- In-side : H15 $\frac{1}{4}$ ×W12 $\frac{3}{8}$ ×D12 $\frac{3}{4}$ inch
- Approx. Wt : 73Kgs, 161Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf



#### PBK-R (F)




- Outside : H506×W435×D502mm
- In-side : H386×W315×D325mm
- Outside : H19 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D19 $\frac{3}{4}$ inch
- In-side : H15 $\frac{1}{4}$ ×W12 $\frac{3}{8}$ ×D12 $\frac{3}{4}$ inch
- Approx. Wt : 73Kgs, 161Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf

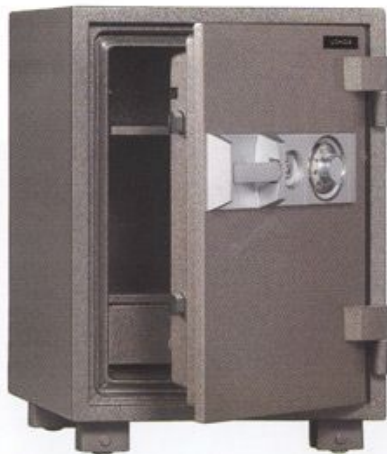

#### BK-90



- Outside : H680×W452×D516mm
- In-side : H480×W312×D324mm
- Outside : H26 $\frac{1}{2}$ ×W17 $\frac{1}{2}$ ×D20 $\frac{1}{2}$ inch
- In-side : H18 $\frac{1}{2}$ ×W12 $\frac{1}{2}$ ×D12 $\frac{1}{2}$ inch
- Approx. Wt : 94Kgs/207Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf

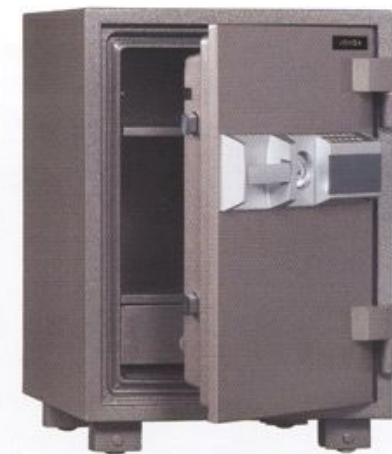

#### PBK-90



- Outside : H680×W452×D516mm
- In-side : H480×W312×D324mm
- Outside : H26 $\frac{1}{2}$ ×W17 $\frac{1}{2}$ ×D20 $\frac{1}{2}$ inch
- In-side : H18 $\frac{1}{2}$ ×W12 $\frac{1}{2}$ ×D12 $\frac{1}{2}$ inch
- Approx. Wt : 94Kgs/207Lbs
- Fittings : 1 Plastic tray, 1 Adjustable shelf

\* Hinge(W) 37mm, Dial(D) 28mm is included.

※ Fingerprint device is available for your requirement.



**BK-M**




- Outside : H628×W494×D550mm
- In-side : H16 $\frac{3}{4}$ ×W13 $\frac{3}{8}$ ×D13 $\frac{3}{8}$ inch
- In-side : H424×W345×D341mm
- Approx. Wt : 100Kgs/220Lbs
- Outside : H24 $\frac{3}{4}$ ×W19 $\frac{1}{2}$ ×D21 $\frac{1}{8}$ inch
- Fittings : 1 Plastic tray, 2 Adjustable shelves



**PBK-M**



- Outside : H628×W494×D550mm
- In-side : H16 $\frac{3}{4}$ ×W13 $\frac{3}{8}$ ×D13 $\frac{3}{8}$ inch
- In-side : H424×W345×D341mm
- Approx. Wt : 100Kgs/220Lbs
- Outside : H24 $\frac{3}{4}$ ×W19 $\frac{1}{2}$ ×D21 $\frac{1}{8}$ inch
- Fittings : 1 Plastic tray, 2 Adjustable shelves

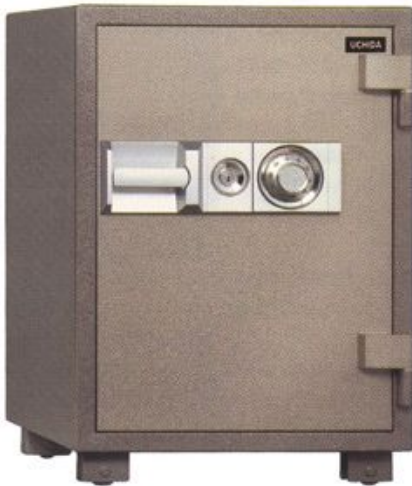

**BK-K**




- Outside : H718×W494×D550mm
- In-side : H20 $\frac{1}{4}$ ×W13 $\frac{3}{8}$ ×D13 $\frac{3}{8}$ inch
- In-side : H514×W345×D341mm
- Approx. Wt : 127Kgs, 280Lbs
- Outside : H28 $\frac{1}{4}$ ×W19 $\frac{1}{2}$ ×D21 $\frac{1}{8}$ inch
- Fittings : 1 Plastic tray, 2 Adjustable shelves



**PBK-K**




- Outside : H718×W494×D550mm
- In-side : H20 $\frac{1}{4}$ ×W13 $\frac{3}{8}$ ×D13 $\frac{3}{8}$ inch
- In-side : H514×W345×D341mm
- Approx. Wt : 127Kgs, 280Lbs
- Outside : H28 $\frac{1}{4}$ ×W19 $\frac{1}{2}$ ×D21 $\frac{1}{8}$ inch
- Fittings : 1 Plastic tray, 2 Adjustable shelves

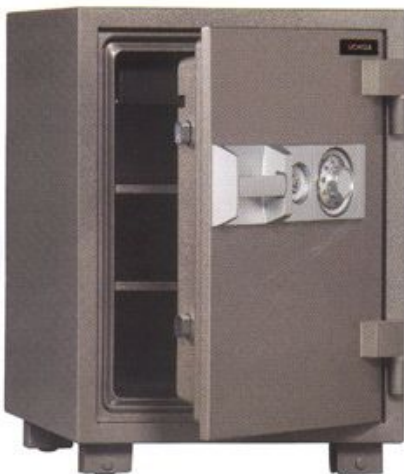

**BK-H**



- Outside : H675×W478×D533mm
- In-side : H18 $\frac{1}{2}$ ×W12 $\frac{1}{2}$ ×D12 $\frac{1}{2}$ inch
- In-side : H464×W329×D330mm
- Approx. Wt : 110Kgs, 240Lbs
- Outside : H26 $\frac{1}{4}$ ×W18 $\frac{1}{2}$ ×D20 $\frac{1}{8}$ inch
- Fittings : 1 Plastic Tray, 2 Adjustable Shelves

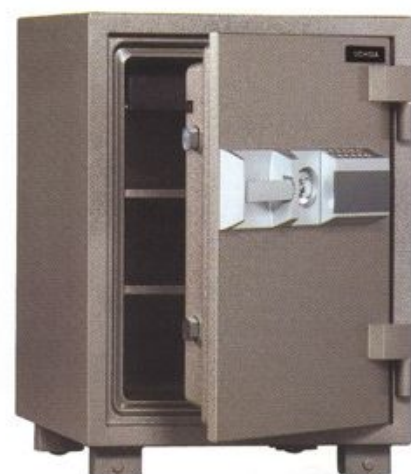

**PBK-H**



- Outside : H675×W478×D533mm
- In-side : H18 $\frac{1}{2}$ ×W12 $\frac{1}{2}$ ×D12 $\frac{1}{2}$ inch
- In-side : H464×W329×D330mm
- Approx. Wt : 110Kgs, 240Lbs
- Outside : H26 $\frac{1}{4}$ ×W18 $\frac{1}{2}$ ×D20 $\frac{1}{8}$ inch
- Fittings : 1 Plastic Tray, 2 Adjustable Shelves

※ Foot(H) 55mm & Facia(W) 37mm is included.



## Passed 2hr fire rathing

Passed 2Hrs JIS Fire rating / Certi No. 02C095/JIS S-1037  
Passed 15min, JIS impact test

Passed NT Fire 017-120, SP Fire rating / Certi No. 106604/SPCR002  
Passed 2Hrs KS Fire rating / Certi No. 2002-115/4500



The foot & Drawer can be assemble or disassleble.



### ■ Features

- ▶ Designed to maximize fire resistance
- ▶ Maximization of fire resistance by an exact fit between the door and main body
- ▶ Ensuring a high level of security through a dial lock feature that allows to change the combination of numbers and an automatic lock system for the double security
- ▶ **Digital Type** : User-friendly angles and color of buttons increase its functionality
- ▶ **Fingerprint Type** : A high recognition rate and exceptional security
- ▶ **Choice of lock system** : Digital, Dial Combination, Fingerprint and Two Key type
- ▶ Two hour fire resistant capacity (KS, JIS, SP)
- ▶ Improved performance through the thick fire resistance wall
- ▶ A separate drawer installed at the bottom in-side the main body
- ▶ A sufficient number of shelves installed



### BK-17

- Outside : H710×W610×D630mm
- In-side : H450×W430×D376mm
- Outside : H27 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H17 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 176Kgs/388Lbs
- Fittings : 1 Lockable drawer, 1 Adjustable shelf



### BK-21

- Outside : H910×W610×D630mm
- In-side : H650×W430×D376mm
- Outside : H35 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H25 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 216Kgs/476Lbs
- Fittings : 1 Lockable drawer, 1 Adjustable shelf



### BK-24

- Outside : H1,010×W610×D630mm
- In-side : H750×W430×D376mm
- Outside : H39 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H29 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 244Kgs/538Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-17E

- Outside : H710×W610×D630mm
- In-side : H450×W430×D376mm
- Outside : H27 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H17 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 176Kgs/388Lbs
- Fittings : 1 Lockable drawer, 1 Adjustable shelf



### BK-21E

- Outside : H910×W610×D630mm
- In-side : H650×W430×D376mm
- Outside : H35 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H25 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 216Kgs/476Lbs
- Fittings : 1 Lockable drawer, 1 Adjustable shelf



### BK-24E

- Outside : H1,010×W610×D630mm
- In-side : H750×W430×D376mm
- Outside : H39 $\frac{3}{4}$ ×W24×D24 $\frac{3}{4}$ inch
- In-side : H29 $\frac{3}{4}$ ×W16 $\frac{3}{4}$ ×D14 $\frac{3}{4}$ inch
- Approx. Wt : 244Kgs/538Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves

\* Foot(H) 80mm & Handle(D) 44mm is included



### Digital Type

This product is equipped with a digital lock that can be unlocked by entering 2 -10 digits. The position and angle of the key pad allows users to enter these digits most conveniently. In anticipation of unforeseeable trouble, there is also an override code provided for safety.



### Fingerprint Type

The level of security of this type of safe is exceptional, because after you initially store your fingerprints and then scan your finger to open the door, the safe will verify the stored fingerprints and then transmit the signal.

Since the registered fingerprint is the only key, it eliminates the inconvenience of carrying a key around and the danger of copying the key or losing it, thus this system ensures safety and security.

Most of all it is so ergonomically designed and crafted in terms of its position and angle that it provides the most convenient access in an office working environment.

In anticipation of unforeseeable trouble in the fingerprint sensor system, there is also an override code provided for safety.




### Dial Type

A much improved high quality chrome finish on the surface of the dial renders the three dimensional and metallic feel and clockwise and counterclockwise dialing when working with number combinations strengthens its safety and security.



### BK-26



- Outside : H1,110×W610×D630mm
- In-side : H850×W430×D376mm
- Outside : H43¼×W24×D24¼inch
- In-side : H33½×W16⅞×D14¾inch
- Approx. Wt : 260Kgs/573Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-30



- Outside : H1,310×W610×D630mm
- In-side : H1050×W430×D376mm
- Outside : H51¼×W24×D24¼inch
- In-side : H41¼×W16⅞×D14¾inch
- Approx. Wt : 303Kgs/668Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-26F



- Outside : H1,010×W610×D630mm
- In-side : H750×W430×D376mm
- Outside : H39¾×W24×D24¼inch
- In-side : H29½×W16⅞×D14¾inch
- Approx. Wt : 244Kgs/538Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-26E



- Outside : H1,110×W610×D630mm
- In-side : H850×W430×D376mm
- Outside : H43¼×W24×D24¼inch
- In-side : H33½×W16⅞×D14¾inch
- Approx. Wt : 260Kgs/573Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-30E




- Outside : H1,310×W610×D630mm
- In-side : H1050×W430×D376mm
- Outside : H51¼×W24×D24¼inch
- In-side : H41¼×W16⅞×D14¾inch
- Approx. Wt : 303Kgs/668Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves




## Passed 2hr fire rating

Passed 2Hrs KS Fire rating / Certi No. 2002-115/4500



The foot & Drawer can be assemble or disassemble.



## Features

- ▶ This is a popular model for office use and widely used at more spacious business locations or public institutions where they deal with large volume of deposits.
- ▶ Ensuring a high level of security through a dial lock feature that allows the user to change the combination of numbers and an automatic lock system for the double security
- ▶ **Digital Type** : User-friendly angles and color of buttons increase its functionality
- ▶ **Fingerprint Type** : Accurate recognition and exceptional security
- ▶ **Choice of lock system** : Digital, Dial Combination, Fingerprint, and Two Key type
- ▶ One to two hour fire resistant capacity (KS, JIS)
- ▶ Improved performance through the thick fire resistance wall
- ▶ A separate drawer installed at the bottom of the main body
- ▶ A sufficient number of shelves installed



### BK-38



- Outside : H1,310×W750×D719mm
- In-side : H1,050×W570×D465mm
- Outside : H51¼×W29½×D28¼inch
- In-side : H41¼×W22¾×D18¼inch
- Approx. Wt : 382Kgs/842Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-44



- Outside : H1,510×W750×D719mm
- In-side : H1,250×W570×D465mm
- Outside : H59¼×W29½×D28¼inch
- In-side : H49¼×W22¾×D18¼inch
- Approx. Wt : 442Kgs/974Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-50



- Outside : H1,710×W750×D719mm
- In-side : H1,450×W570×D465mm
- Outside : H66¼×W29½×D28¼inch
- In-side : H57¼×W22¾×D18¼inch
- Approx. Wt : 500Kgs/1102Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-38E



- Outside : H1,310×W750×D719mm
- In-side : H1,050×W570×D465mm
- Outside : H51¼×W29½×D28¼inch
- In-side : H41¼×W22¾×D18¼inch
- Approx. Wt : 382Kgs/842Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-44E



- Outside : H1,510×W750×D719mm
- In-side : H1,250×W570×D465mm
- Outside : H59¼×W29½×D28¼inch
- In-side : H49¼×W22¾×D18¼inch
- Approx. Wt : 442Kgs/974Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves



### BK-50E



- Outside : H1,710×W750×D719mm
- In-side : H1,450×W570×D465mm
- Outside : H66¼×W29½×D28¼inch
- In-side : H57¼×W22¾×D18¼inch
- Approx. Wt : 500Kgs/1102Lbs
- Fittings : 1Lockable Drawer, 3Adjustable Shelves

\* Foot(H) 80mm, & Handle(D) 44mm is included.



### Fingerprint Type

The level of security of this type of safe is exceptional, because after you initially store your fingerprints and then scan your finger to open the door, the safe will verify the stored fingerprints and then transmit the signal. Since the registered fingerprint is the only key, it eliminates the inconvenience of carrying a key around and the danger of copying the key or losing it, thus this system ensures safety and security. Most of all it is so ergonomically designed and crafted in terms of its position and angle that it provides the most convenient access in an office working environment. In anticipation of unforeseeable trouble in the fingerprint sensor system, there is also an override code provided for safety.



### Digital Type

This product is equipped with a digital lock that can be unlocked by entering 2 -10 digits.

The position and angle of the key pad allows users to enter these digits most conveniently.

In anticipation of unforeseeable trouble, there is also an override code provided for safety.



### BK-62



- Outside : H1,580×W1,142×D690mm
- In-side : H1,320×W962×D450mm
- Outside : H61 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H52×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 620Kgs/1367Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



### BK-66



- Outside : H1,710×W1,142×D690mm
- In-side : H1,450×W962×D450mm
- Outside : H66 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H57 $\frac{1}{4}$ ×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 660Kgs/1455Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



### BK-69



- Outside : H1,810×W1,142×D690mm
- In-side : H1,550×W962×D450mm
- Outside : H70 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H61×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 694Kgs/1530Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



### BK-62E



- Outside : H1,580×W1,142×D690mm
- In-side : H1,320×W962×D450mm
- Outside : H61 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H52×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 620Kgs/1367Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



### BK-66E



- Outside : H1,710×W1,142×D690mm
- In-side : H1,450×W962×D450mm
- Outside : H66 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H57 $\frac{1}{4}$ ×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 660Kgs/1455Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



### BK-69E



- Outside : H1,810×W1,142×D690mm
- In-side : H1,550×W962×D450mm
- Outside : H70 $\frac{3}{4}$ ×W45×D27 $\frac{1}{2}$ inch
- In-side : H61×W37 $\frac{3}{8}$ ×D17 $\frac{3}{8}$ inch
- Approx. Wt : 694Kgs/1530Lbs
- Fittings : 2Lockable Drawers, 3Adjustable Shelves



## Passed 1hr fire rathing



Passed 1Hrs JIS Fire rating / Certi No, 02C095/JIS S-1037



KSG 4500



Passed NT Fire 017-90, SP Fire rating / Certi No, 106602/SPCR002

### ■ Features

- ▶ Digital type ensures a high level of security through a feature that allows the user to change the combination of numbers. And an automatic lock system for the double security. It was also designed with user-friendly angles and color of buttons which increase its functionality.
- ▶ **Choice of lock system** : Digital, Dial Combination, Fingerprint, and Two Key type

- ▶ 1 Hour / 90 minute fire resistant capacity (KS, JIS, SP)
- ▶ Improved performance through thick fire resistance wall
- ▶ A separate drawer installed at the bottom in the main body
- ▶ A sufficient number of shelves installed



### BK-172



- Outside : H850×W580×D553mm
- In-side : H623×W433×D345mm
- Outside : H33 $\frac{1}{2}$ ×W22 $\frac{1}{2}$ ×D21 $\frac{1}{2}$ inch
- In-side : H24 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D13 $\frac{1}{4}$ inch
- Approx. Wt : 172Kgs, 380Lbs
- Fittings : 1 Lockable Drawer, 1 Adjustable Shelf



### BK-195




- Outside : H1,000×W580×D553mm
- In-side : H773×W433×D345mm
- Outside : H39 $\frac{3}{8}$ ×W22 $\frac{1}{2}$ ×D21 $\frac{1}{2}$ inch
- In-side : H30 $\frac{1}{4}$ ×W17×D13 $\frac{1}{4}$ inch
- Approx. Wt : 195Kgs, 430Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-235



- Outside : H1,100×W640×D587mm
- In-side : H873×W493×D376mm
- Outside : H43 $\frac{1}{4}$ ×W25 $\frac{1}{4}$ ×D23 $\frac{1}{4}$ inch
- In-side : H34 $\frac{1}{4}$ ×W19 $\frac{1}{4}$ ×D14 $\frac{1}{4}$ inch
- Approx. Wt : 235Kgs, 518Lbs
- Fittings : 1 Lockable Drawer, 2 Adjustable Shelves

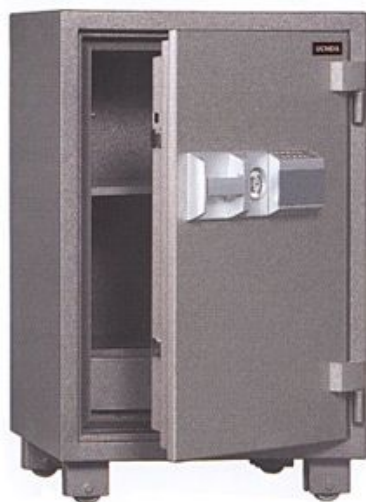

### BK-172E



- Outside : H850×W580×D553mm
- In-side : H623×W433×D345mm
- Outside : H33 $\frac{1}{2}$ ×W22 $\frac{1}{2}$ ×D21 $\frac{1}{2}$ inch
- In-side : H24 $\frac{1}{4}$ ×W17 $\frac{1}{4}$ ×D13 $\frac{1}{4}$ inch
- Approx. Wt : 172Kgs, 380Lbs
- Fittings : 1 Lockable Drawer, 1 Adjustable Shelf



### BK-195E



- Outside : H1,000×W580×D553mm
- In-side : H773×W433×D345mm
- Outside : H39 $\frac{3}{8}$ ×W22 $\frac{1}{2}$ ×D21 $\frac{1}{2}$ inch
- In-side : H30 $\frac{1}{4}$ ×W17×D13 $\frac{1}{4}$ inch
- Approx. Wt : 195Kgs, 430Lbs
- Fittings : 1Lockable Drawer, 2Adjustable Shelves



### BK-235E



- Outside : H1,100×W640×D587mm
- In-side : H873×W493×D376mm
- Outside : H43 $\frac{1}{4}$ ×W25 $\frac{1}{4}$ ×D23 $\frac{1}{4}$ inch
- In-side : H34 $\frac{1}{4}$ ×W19 $\frac{1}{4}$ ×D14 $\frac{1}{4}$ inch
- Approx. Wt : 235Kgs, 518Lbs
- Fittings : 1 Lockable Drawer, 2 Adjustable Shelves

\* Foot(H) 80mm, Facia(D) 37mm is included.



### BK-265

- Outside : H1220×W640×D637mm
- In-side : H993×W493×D419mm
- Outside : H48×W25½×D25¼inch
- In-side : H39¾×W19¾×D16½inch
- Approx. Wt : 265Kgs/587Lbs
- Fittings : 1Lockable Drawers, 3Adjustable Shelves




### BK-370

- Outside : H1400×W750×D687mm
- In-side : H1173×W603×D469mm
- Outside : H55½×W29½×D27¼inch
- In-side : H46¼×W23¼×D18½inch
- Approx. Wt : 370Kgs/816Lbs
- Fittings : 1 Lockable Drawers, 3Adjustable Shelves



### BK-265E

- Outside : H1,220×W640×D637mm
- In-side : H993×W493×D419mm
- Outside : H48×W25½×D25¼inch
- In-side : H39¾×W19¾×D16½inch
- Approx. Wt : 265Kgs/587Lbs
- Fittings : 1Lockable Drawers, 3Adjustable Shelves

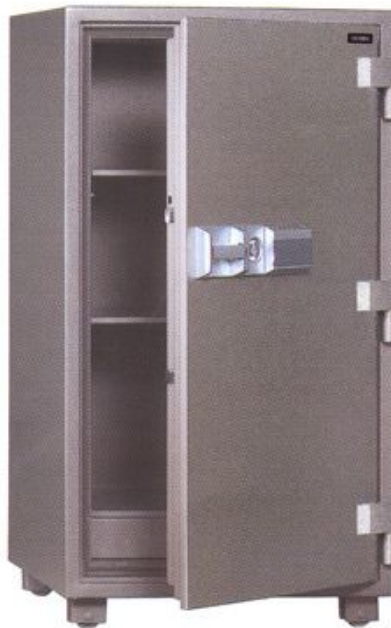

### BK-370E

- Outside : H1,400×W750×D687mm
- In-side : H1,173×W603×D469mm
- Outside : H55½×W29½×D27¼inch
- In-side : H46¼×W23¼×D18½inch
- Approx. Wt : 370Kgs/816Lbs
- Fittings : 1 Lockable Drawers, 3Adjustable Shelves

## lock system



### Digital Type

This product is equipped with a digital lock that can be unlocked by entering 2 -10 digits. The position and angle of the key pad allows users to enter these digits most conveniently. In anticipation of unforeseeable trouble, there is also an override code provided for safety.



### Fingerprint Type

The level of security of this type of safe is exceptional, because after you initially store your fingerprints and then scan your finger to open the door, the safe will verify the stored fingerprints and then transmit the signal. Since the registered fingerprint is the only key, it eliminates the inconvenience of carrying a key around and the danger of copying the key or losing it, thus this system ensures safety and security. Most of all it is so ergonomically designed and crafted in terms of its position and angle that it provides the most convenient access in an office working environment. In anticipation of unforeseeable trouble in the fingerprint sensor system, there is also an override code provided for safety.